




# JCB GROUND CARE DUMPSTER | HTD5



MAX. ENGINE POWER: 4 – 6kW (5 – 8hp)  
 MAX. CARRYING CAPACITY: 500kg (1102lb)

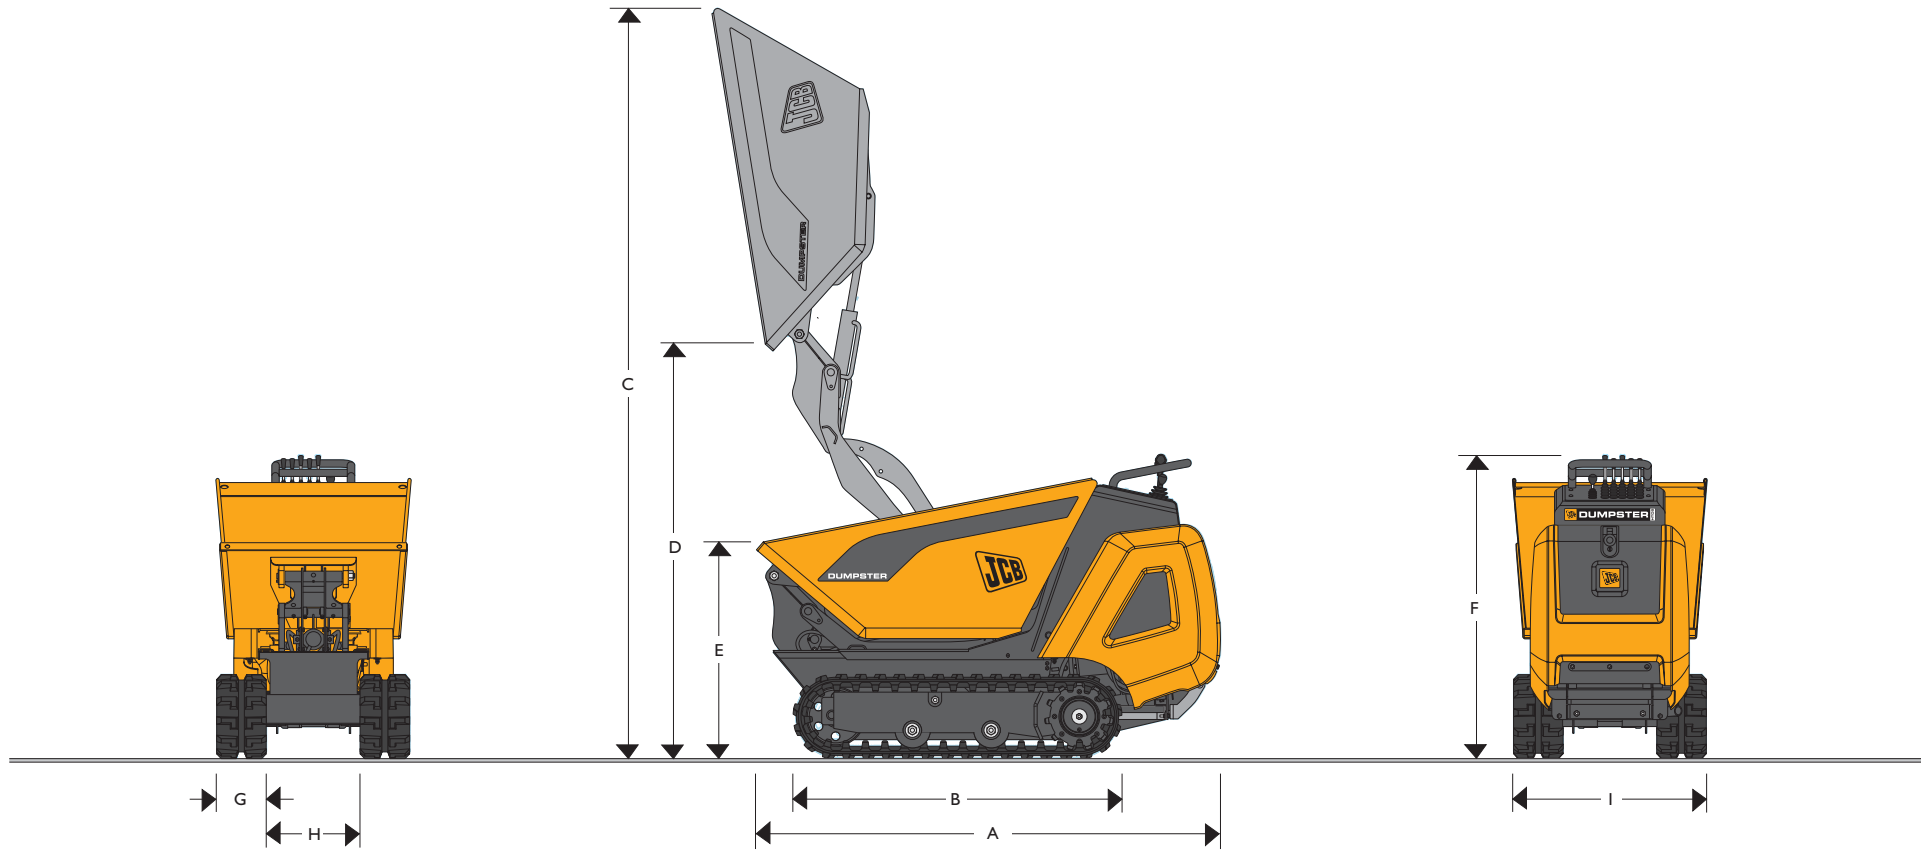

## STATIC DIMENSIONS

Machine model	HTD5
	mm (ft-in)
A Machine length (operating position)	1700 (5-6)
B Undercarriage length	850 (2-9)
C Maximum height (tipping position)	2720 (9-0)
D Skip ground clearance (tipping position)	1450 (4-9)
E Skip height (transport position)	800 (2-7)

Machine model	HTD5
	mm (ft-in)
F Overall height (transport position)	1100 (3-7)
G Track width	180 (0-7)
H Inside track width	330 (1-0)
I Maximum machine width	690 (2-3)



## JCB GROUND CARE DUMPSTER | HTD5



### WEIGHTS & CAPACITIES

Machine weight	kg (lb)	475 (1047)
Max. carrying capacity	kg (lb)	500 (1102)
Operating weight (no load)	kg (lb)	550 (1213)
Max. operating weight (with load)	kg (lb)	1050 (2315)
Fuel tank capacity (Lombardini)	litres (in <sup>3</sup> )	4.5 (214)
Fuel tank capacity (Yanmar)	litres (in <sup>3</sup> )	3.5 (275)
Fuel tank capacity (Honda)	litres (in <sup>3</sup> )	5.5 (336)
Hydraulic tank capacity	litres (in <sup>3</sup> )	14 (854)

### LOMBARDINI ENGINE

Model		15LD 350S
Max. power	kW (hp)	4 (5)
Max. rpm		3000
Number of cylinders		1
Displacement	cm <sup>3</sup> (in <sup>3</sup> )	349 (21)

### YANMAR ENGINE

Model		L70
Max. power	kW (hp)	5 (7)
Max. rpm		3000
Number of cylinders		1
Displacement	cm <sup>3</sup> (in <sup>3</sup> )	296 (18)

### HONDA PETROL ENGINE

Model		GX240
Max. power	kW (hp)	6 (8)
Max. rpm		3000
Number of cylinders		1
Displacement	cm <sup>3</sup> (in <sup>3</sup> )	240 (15)

### HYDRAULICS

Pump number		3
Pump output	l/min (gal/min)	27 (6)
Operating pressure	bar	150

### TRANSMISSION

Type – 2 speed hydrostatic

### UNDERCARRIAGE

Number of bottom rollers		2
Track tensioning		Grease
Speed range	kph (mph)	0 – 4 (0 – 2.5)

### STANDARD & OPTIONAL EQUIPMENT

0.3m <sup>3</sup> (0.4yd <sup>3</sup> ) skip		Std
2 speed tracking		Std
Hydraulic quick couplings		Opt
Manual pull start		Std
Electric start		Opt



Printed in the UK on paper made from sustainable forests. The pulp used in the manufacture of this paper is made from renewable timber produced on a fully sustainable basis, and is bleached without the use of chlorine gas (ECF – Elemental Chlorine Free). This paper is suitable for recycling.

JCB Groundcare, Rokester, Staffordshire ST14 5JP. Tel: 01889 590312. Fax: 01889 593048. [www.jcb.com](http://www.jcb.com)

JCB reserves the right to change specifications without notice. Illustrations shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.



9999/5319 5/07 Issue 1

A Product of Hard Work